

Stay Connected for Dependability and Reliability with AceTronic

# AceTrax

## TEMP & SVG CONTROLLER

Integrated temperature & sequence valve gate\*

Zones can be grouped


Sensor default solutions can be preset to reduce downtime

Mold patterns management change & set up mold easily



Password Secure / Log & Alarm

Real time historical curve display analysis

Exportable Temperature data records

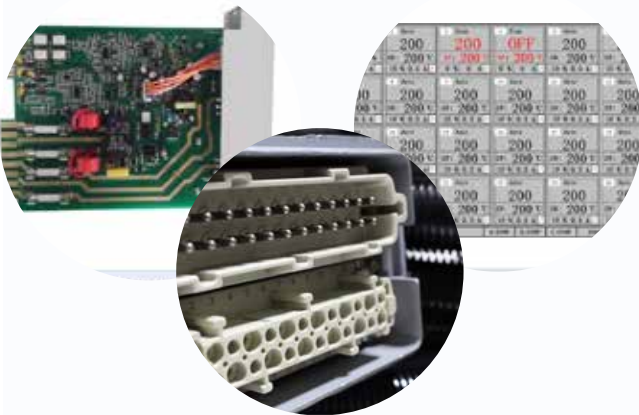

\* zones can be configured as SVG.

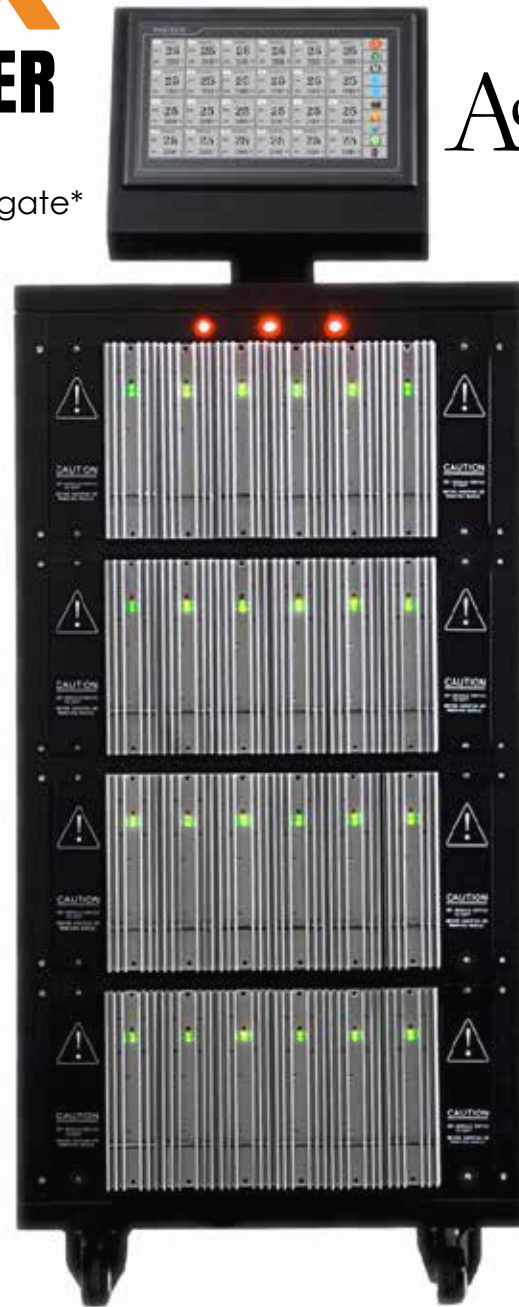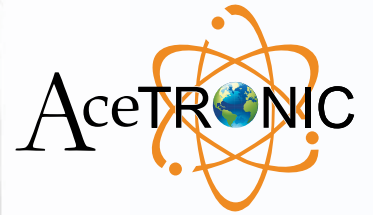

2-120  
ZONES

24  
ZONES AS  
SVG  
CONTROLLER

FULL  
COLOR  
LCD TOUCH SCREEN

ESA/CE  
COMPLIANT

## KEEPING YOU CONNECTED!



VISIT US ONLINE AT  
**ACETRONIC.COM**

Dedicated to keeping you connected, online & in production. Think of us as an extension of your maintenance program.

To get started, visit [acetronic.com/contact](http://acetronic.com/contact)

**1.800.803.8871**

**sales@acetronic.com**

# MODELS

	M20-XS	M20-S	M20-M	M20-L
Zones	2-16	2-32	2-64	2-120
Display Size	7.0"	10.2"	10.2"	10.2"
User Interface	Full color touch screen, 2 style interface selectable			
Language	English, Spanish version selectable			
Power Supply	3-PH+E (4-wire) AC220V / 3PH+N+E (5-wire) AC380V, 50/60Hz			
Sensor	Thermocouple J-Type/K-Type/E-Type			
Temperature Range	0°C-450°C (32°F - 842°F)			
Control Mode	Fuzzy PID / Manual			
Control Accuracy	±0.5°C			
Power Control	Phase Angle / Zero Cross			
Rated Load	100-3600W (AC240V) / zone			
Connector Type	Customized			
Wiring Mode	Customized			
Circumstance	0°C - 55°C (32°F - 131°F) / 10% RH-85%RH			



2 style interface selectable

Background color selectable for each zone

English / Spanish version selectable



**M20-XS**  
2 - 16 Zones



**M20-S**  
2 - 32 Zones



**M20-M**  
2 - 64 Zones



**M20-L**  
2 - 120 Zones

**Stay Connected for Dependability and Reliability with AceTronic**



FIND US ONLINE AT  
**ACETRONIC.COM**

**sales@acetronic.com**

**1.800.803.8871**